



VIS040 Visage LED Multipar Operation Manual

The Visage 3W Tricolour LED Multipar delivers bright, colourful and dynamic lighting effects and is ideal for a number of applications including theatres, clubs and stages.

A Specification:

1. Weight: 6.7kg
2. Size: 300 x 270 x 220mm
3. Power input: AC 120V/240V, 60Hz/50Hz
4. Wattage: 80W
5. LEDs: 18PCS RGB 3W tri-color 3pcs in one
6. Beam angle of LEDs: 40 degree;
7. 3PIN female XLR socket and 3PIN male XLR socket
8. Built-in microphone
9. **Thermal protection.**

B. Function description:

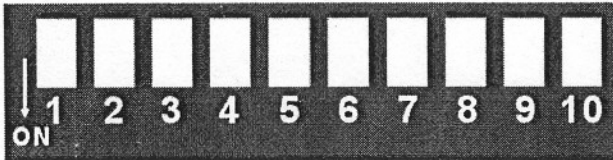

Mode	Dip10 dip9	Dip8 dip7 dip6 dip5 dip4 dip3 dip2 dip1	Function
Auto Run (Master projector)	0 0	X X 0 0 0 0 0 0	Colour changing and colour fading Select running speed via dip7, dip 8
		0 0 X X X X X X	Static colour and flash select static color via dip1~dip3(separately for R.G.B) select flash speed via Dip4~dip6
Sound activated (Master projector)	0 1	X X X X X X X X	Change colour via sound activated
DMX	1 X	X X X X X X X X	DMX mode CH1→R CH2→G CH3→B CH4→Dimmer CH5→flash
Other	1 0	0 0 0 0 0 0 0 1	1. DMX address is 1 when in DMX mode 2. As Slave projector when in M/S mode
	1 0	0 0 0 0 0 0 0 0	Black out

DMX Value/Function

CHANNEL	VALUE	FUNCTION
CH1	000-255	RED
CH2	000-255	GREEN
CH3	000-255	BLUE
CH4	000-255	DIMMER
CH5	0-10	No function
	11-255	Strobe slowest to fastest flash frequency is 0.5HZ-30HZ